



### DATA SHEET

Data Sheet number  
**04.24**

Revision number  
**v.2**

Revision date  
**15.07.2025**

Product code

as listed in the table

### HYGIENIC HOSES WITH CRIMPED FITTINGS ½”



**ISO 9001**  
QUALITY  
PN - EN ISO 9001

MADE WITH  
**100%  
STAINLESS  
STEEL**

MATERIAL	PVC, Polyester, Stainless Steel
COLORS	Blue <b>B</b>
INNER DIAMETER	12+/-0,6
OUTER DIAMETER	20+/-0,6
BENDING DIAMETER	108 mm
APPROXIMATE THICKNESS	4 mm
MAX.WORKING PRESSURE	20 bar — only for a very short time (hose recommended for mains water systems)



(EU) N° 10/2011





### SAMPLE PRODUCT CODES

TYPE	CODE	THREAD	LENGTH	NAME	WEIGHT	PACKAGE DIMENSIONS (W x H x D)	NUMBER OF PIECES ON THE PALLET
CONNECTION HOSE	01.02.015.02	2 x INT FLAT 1/2"	1,5 m	HYGIENIC connection hose with crimped fittings INT thread 1/2" - 1,5 m	592 g	1 foil	-
	01.02.015.01	2 x EXT FLAT 1/2"	1,5 m	HYGIENIC connection hose with crimped fittings EXT thread 1/2" - 1,5 m	568 g	1 foil	-
	01.02.015.12	EXT/INT FLAT 1/2"	1,5 m	HYGIENIC connection hose with crimped fittings EXT/INT thread 1/2" - 1,5 m	580 g	1 foil	-
	01.02.02.02	2 x INT FLAT 1/2"	2 m	HYGIENIC connection hose with crimped fittings INT thread 1/2" - 2 m	708 g	1 foil	-
	01.02.02.01	2 x EXT FLAT 1/2"	2 m	HYGIENIC connection hose with crimped fittings EXT thread 1/2" - 2m	684 g	1 foil	-
	01.02.02.12	EXT/INT FLAT 1/2"	2 m	HYGIENIC connection hose with crimped fittings EXT/INT thread 1/2" - 2 m	696 g	1 foil	-
	01.02.025.02	2 x INT FLAT 1/2"	2,5 m	HYGIENIC connection hose with crimped fittings INT thread 1/2" - 2,5 m	824 g	1 foil	-
	01.02.025.01	2 x EXT FLAT 1/2"	2,5 m	HYGIENIC connection hose with crimped fittings EXT thread 1/2" - 2,5 m	800 g	1 foil	-
	01.02.025.12	EXT/INT FLAT 1/2"	2,5 m	HYGIENIC connection hose with crimped fittings EXT/INT thread 1/2" - 2,5 m	812 g	1 foil	-
	01.02.03.02	2 x INT FLAT 1/2"	3 m	HYGIENIC connection hose with crimped INT thread 1/2" - 3 m	940 g	1 foil	-
	01.02.03.01	2 x EXT FLAT 1/2"	3 m	HYGIENIC Connection hose with crimped EXT thread 1/2" - 3 m	916 g	1 foil	-
	01.02.03.12	EXT/INT FLAT 1/2"	3 m	HYGIENIC connection hose with crimped EXT/INT thread 1/2" - 3 m	928 g	1 foil	-
CLEANING HOSE	01.02.15.01	2 x EXT FLAT 1/2"	15 m	HYGIENIC Hose with crimped fittings EXT Thread 1/2" - 15 m	3,7 kg	41 x 41 x 25 cm	42
	01.02.15.02	2 x INT FLAT 1/2"	15 m	HYGIENIC Hose with crimped fittings INT Thread 1/2" - 15 m	3,7 kg	41 x 41 x 25 cm	42
	01.02.15.12	INT/EXT FLAT 1/2"	15 m	HYGIENIC Hose with crimped fittings EXT/INT Thread 1/2" - 15 m	3,7 kg	41 x 41 x 25 cm	42
	01.02.20.01	2 x EXT FLAT 1/2"	20 m	HYGIENIC Hose with crimped fittings EXT Thread 1/2" - 20 m	4,9 kg	41 x 41 x 25 cm	42
	01.02.20.02	2 x INT FLAT 1/2"	20 m	HYGIENIC Hose with crimped fittings INT Thread 1/2" - 20 m	4,9 kg	41 x 41 x 25 cm	42
	01.02.20.12	EXT/INT FLAT 1/2"	20 m	HYGIENIC Hose with crimped fittings EXT/INT Thread 1/2" - 20 m	4,9 kg	41 x 41 x 25 cm	42



# CLEANACCESS

## FOOD HYGIENE EQUIPMENT



01.02.25.01	2 x EXT FLAT 1/2"	25 m	HYGIENIC Hose with crimped fittings EXT Thread 1/2" - 25 m	6,0 kg	41 x 41 x 25 cm	42
01.02.25.02	2 x INT 1/2" FLAT	25 m	HYGIENIC Hose with crimped fittings INT Thread 1/2" - 25 m	6,0 kg	41 x 41 x 25 cm	42
01.02.25.12	EXT/INT FLAT 1/2"	25 m	HYGIENIC Hose with crimped fittings EXT/INT Thread 1/2" - 25 m	6,0 kg	41 x 41 x 25 cm	42

### CREATE PRODUCT CODES

#### PRODUCT GROUP

#### LENGTH


(in running meter)

#### STANDARD LENGTHS:

Connection Hoses — 1,5,  
2, 2,5 i 3 m  
Cleaning Hoses — 15,  
20, 25, 30 m

#### TYPES OF FITTINGS - CRIMPED

01 — 2 x EXT THREAD FLAT  
02 — 2 x INT THREAD FLAT  
12 — INT/EXT THREAD FLAT  
05 — 2 x INT THREAD CONE  
06 — 2 x EXT THREAD CONE  
15 — INT CONE / EXT FLAT  
25 — INT CONE / INT FLAT  
16 — EXT CONE / EXT FLAT  
26 — EXT CONE / INT FLAT  
10 — 2 x MALE QUICK COUPLING  
101 — MALE QUICK COUPLING / EXT FLAT  
102 — MALE QUICK COUPLING / INT FLAT  
105 — MALE QUICK COUPLING / INT CONE  
106 — MALE QUICK COUPLING / EXT CONE

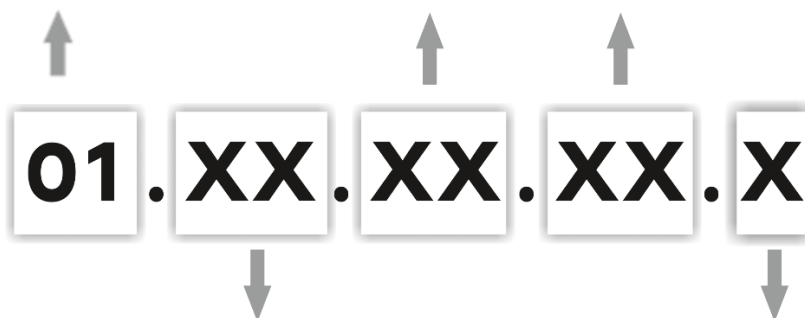

#### HOSE GROUP

02 — HYGIENIC 1/2"  
03 — HYGIENIC 3/4"

#### COLOUR

B — blue




# CLEANACCESS

## FOOD HYGIENE EQUIPMENT



Maksymalne ciśnienie robocze  
Maximum working pressure  
Максимальное рабочее давление

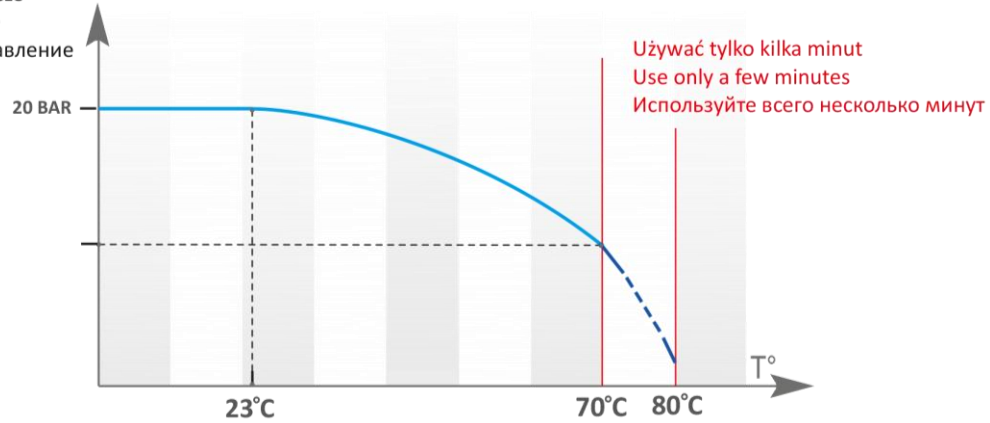

- Recommended for mains water system (6 bar). It is not designed for Central Cleaning System.
- Manufactured with 5 layers.
- Flexible and durable.
- Manufactured with textile reinforcement.
- Used for warm and cold water (max temperature — 70 degree of Celsius).
- The outer layer of this hose does not dye and is non-dusting.
- Food contact compliance declaration is available on request.
- Sections of hoses with thread of flat sealing are equipped with a set of Teflon gaskets.
- Crimped or twisted fittings are available with flat or cone sealing options and with internal or external thread or as male quick coupling version.
- When installing the fittings on your own it is important to pay attention to the type of the fitting used (suitable for HYGIENIC hose) and the correctness of the fitting assembly. Not properly fitted or wrong fitting type will damage the hose.