



DATA SHEET


revision date
25.09.2024

code

01.02.XX.XX.B

HYGIENIC HOSES WITH CRIMPED FITTINGS ½"



MATERIAL	PVC, Polyester, Stainless Steel
COLORS	Blue 
INNER DIAMETER	12+/-0,6
OUTER DIAMETER	20+/-0,6
BENDING DIAMETER	108 mm
APPROXIMATE THICKNESS	4 mm
MAX.WORKING PRESSURE	20 bar — only for a very short time (hose recommended for mains water systems)





SAMPLE PRODUCT CODES

TYPE	CODE	THREAD	LENGTH	NAME	WEIGHT	PACKAGE DIMENSIONS (W x H x D)	NUMBER OF PIECES ON THE PALLET
CONNECTION HOSE	01.02.015.02	2 x INT FLAT 1/2"	1,5 m	HYGIENIC connection hose with crimped fittings INT thread 1/2" - 1,5 m	592 g	1 foil	-
	01.02.015.01	2 x EXT FLAT 1/2"	1,5 m	HYGIENIC connection hose with crimped fittings EXT thread 1/2" - 1,5 m	568 g	1 foil	-
	01.02.015.12	EXT/INT FLAT 1/2"	1,5 m	HYGIENIC connection hose with crimped fittings EXT/INT thread 1/2" - 1,5 m	580 g	1 foil	-
	01.02.02.02	2 x INT FLAT 1/2"	2 m	HYGIENIC connection hose with crimped fittings INT thread 1/2" - 2 m	708 g	1 foil	-
	01.02.02.01	2 x EXT FLAT 1/2"	2 m	HYGIENIC connection hose with crimped fittings EXT thread 1/2" - 2m	684 g	1 foil	-
	01.02.02.12	EXT/INT FLAT 1/2"	2 m	HYGIENIC connection hose with crimped fittings EXT/INT thread 1/2" - 2 m	696 g	1 foil	-
	01.02.025.02	2 x INT FLAT 1/2"	2,5 m	HYGIENIC connection hose with crimped fittings INT thread 1/2" — 2,5 m	824 g	1 foil	-
	01.02.025.01	2 x EXT FLAT 1/2"	2,5 m	HYGIENIC connection hose with crimped fittings EXT thread 1/2" — 2,5 m	800 g	1 foil	-
	01.02.025.12	EXT/INT FLAT 1/2"	2,5 m	HYGIENIC connection hose with crimped fittings EXT/INT thread 1/2" — 2,5 m	812 g	1 foil	-
	01.02.03.02	2 x INT FLAT 1/2"	3 m	HYGIENIC connection hose with crimped INT thread 1/2" - 3 m	940 g	1 foil	-
	01.02.03.01	2 x EXT FLAT 1/2"	3 m	HYGIENIC Connection hose with crimped EXT thread 1/2" - 3 m	916 g	1 foil	-
	01.02.03.12	EXT/INT FLAT 1/2"	3 m	HYGIENIC connection hose with crimped EXT/INT thread 1/2" - 3 m	928 g	1 foil	-
CLEANING HOSE	01.02.15.01	2 x EXT FLAT 1/2"	15 m	HYGIENIC Hose with crimped fittings EXT Thread 1/2" - 15 m	3,7 kg	41 x 41 x 25 cm	42
	01.02.15.02	2 x INT FLAT 1/2"	15 m	HYGIENIC Hose with crimped fittings INT Thread 1/2" - 15 m	3,7 kg	41 x 41 x 25 cm	42
	01.02.15.12	INT/EXT FLAT 1/2"	15 m	HYGIENIC Hose with crimped fittings EXT/INT Thread 1/2" - 15 m	3,7 kg	41 x 41 x 25 cm	42
	01.02.20.01	2 x EXT FLAT 1/2"	20 m	HYGIENIC Hose with crimped fittings EXT Thread 1/2" - 20 m	4,9 kg	41 x 41 x 25 cm	42
	01.02.20.02	2 x INT FLAT 1/2"	20 m	HYGIENIC Hose with crimped fittings INT Thread 1/2" - 20 m	4,9 kg	41 x 41 x 25 cm	42



CLEANACCESS

FOOD HYGIENE EQUIPMENT




01.02.20.12	EXT/INT FLAT ½"	20 m	HYGIENIC Hose with crimped fittings EXT/INT Thread 1/2" - 20 m	4,9 kg	41 x 41 x 25 cm	42
01.02.25.01	2 x EXT FLAT ½"	25 m	HYGIENIC Hose with crimped fittings EXT Thread 1/2" - 25 m	6,0 kg	41 x 41 x 25 cm	42
01.02.25.02	2 x INT ½" FLAT	25 m	HYGIENIC Hose with crimped fittings INT Thread 1/2" - 25 m	6,0 kg	41 x 41 x 25 cm	42
01.02.25.12	EXT/INT FLAT ½"	25 m	HYGIENIC Hose with crimped fittings EXT/INT Thread 1/2" - 25 m	6,0 kg	41 x 41 x 25 cm	42

CREATING PRODUCT CODES

	LENGTH (in running meter)	TYPES OF FITTINGS - CRIMPED
	STANDARD LENGTHS: Connection Hoses — 1,5, 2, 2,5 i 3 m Cleaning Hoses — 15, 20, 25, 30 m	01 — 2 x EXT THREAD FLAT 02 — 2 x INT THREAD FLAT 12 — INT/EXT THREAD FLAT 05 — 2 x INT THREAD CONE 06 — 2 x EXT THREAD CONE 15 — INT CONE / EXT FLAT 25 — INT CONE / INT FLAT 16 — EXT CONE / EXT FLAT 26 — EXT CONE / INT FLAT 10 — 2 x MALE QUICK COUPLING 101 — MALE QUICK COUPLING / EXT FLAT 102 — MALE QUICK COUPLING / INT FLAT 105 — MALE QUICK COUPLING / INT CONE 106 — MALE QUICK COUPLING / EXT CONE

PRODUCT
GROUP

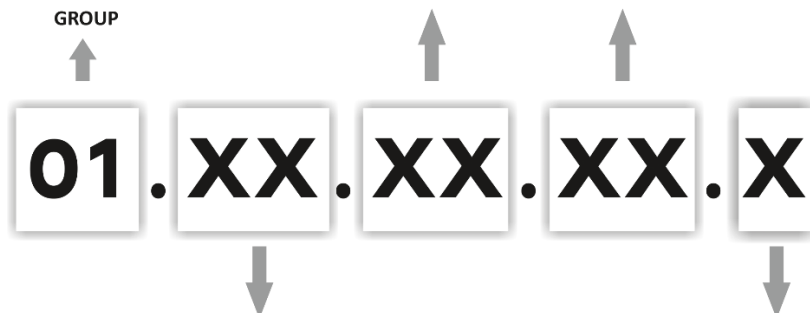

HOSE GROUP


02 — HYGIENIC ½"
03 — HYGIENIC ¾"

COLOUR

B — blue



Maksymalne ciśnienie robocze
Maximum working pressure
Максимальное рабочее давление

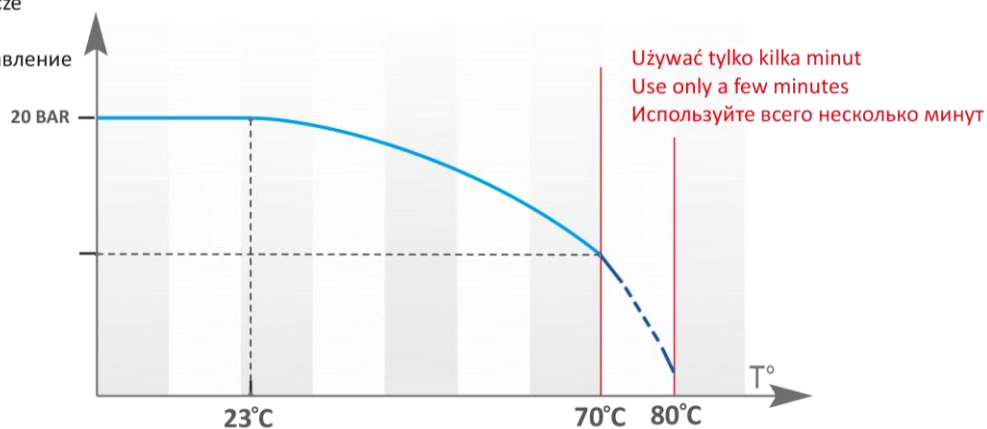

- Recommended for mains water system (6 bar). It is not designed for Central Cleaning System.
- Manufactured with 5 layers.
- Flexible and durable.
- Manufactured with textile reinforcement.
- Used for warm and cold water (max temperature — 70 degree of Celsius).
- The outer layer of this hose does not dye and is non-dusting.
- Food contact compliance declaration is available on request.
- Sections of hoses with thread of flat sealing are equipped with a set of Teflon gaskets.
- Crimped or twisted fittings are available with flat or cone sealing options and with internal or external thread or as male quick coupling version.
- When installing the fittings on your own it is important to pay attention to the type of the fitting used (suitable for HYGIENIC hose) and the correctness of the fitting assembly. Not properly fitted or wrong fitting type will damage the hose.