



DATA SHEET

Data Sheet number
12.25

Revision date
v.2

Revision date
14.07.2025

Product code

as listed in the table

ULTRA HYGIENIC® STAINLESS STEEL BALL VALVE ½"



VALVE MATERIAL	Stainless steel
MAX. WORKING TEMPERATURE	95°C
MAX. WORKING PRESSURE	60 bar
INLET/OUTLET	½" INT / ½" INT




AVAILABLE VERSION OF ½" BALL VALVE

PRODUCT CODE	NAME / VERSION	WEIGHT	NUMBER OF PIECES IN THE PACKAGE	PACKAGE DIMENSIONS (WxHxD)
02.00.00.00	ULTRA HYGIENIC® BALL VALVE ½" WITH BUTTERFLY	225 g	1 (foil) or 10 in multipack	135 x 60 x 175 mm
02.00.00.01	ULTRA HYGIENIC® BALL VALVE ½" WITH FLAT LEVER HANDLE	252 g	1 (foil) or 4 in multipack	135 x 60 x 175 mm
02.01.01.12	ULTRA HYGIENIC® BALL VALVE ½" WITH STAINLESS STEEL PROTECTION	377 g	1 (foil) or 6 in multipack	200 x 70 x 190 mm



AN ARROW INDICATES LIQUID OUTLET

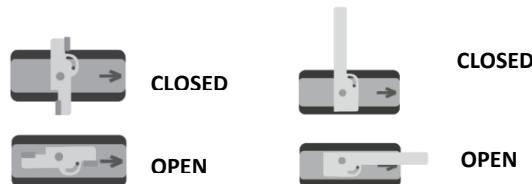

- Solid, durable and hygienic.
- Repeatable and precisely made threads in accordance with ISO standards.
- The limiter of the operating range of the butterfly, which enables the control of the degree of opening and closing of the valve.
- The use of SS protection eliminates the possibility of undesired turning of the butterfly.
- Adapting the valve protection fixing system to the hexagonal shape of the valve itself eliminates rotation around the axis.
- $\frac{1}{2}$ " Ball valve is available in version with swivel and ULTRA HYGIENIC® Antimicrobial female quick coupling, which is available with covers in 4 different colours which allow colour coding as well as in detectable by X-Ray and metal detectors version.