

DATA SHEET

Data Sheet number
21.24

Revision number
v.2

Revision date
16.07.2025

Product code

20.03.00.05.P

CENTRAL DOSING POINT CDP 60/5FSP



WEIGHT	173 kg
MAX. DIMENSIONS (WxHxD)	500 x 1728 x 791 mm
MAX. NUMBER OF USERS	5
MIN. WATER FLOW FEED	120 l/min
WATER INLET	EXT 1 1/4 "
WATER OUTLET	EXT 1 1/4 "
MAX. WORKING PRESSURE	13 bar
PRESSURE (FEED)	2-10 bar
MAX. WATER TEMPERATURE (FEED)	30° C
MAX. POWER CONSUMPTION	6 kW




CLEANACCESS

FOOD HYGIENE EQUIPMENT



BASIC FREQUENCY	50-60 Hz
NOMINAL VOLTAGE	3 x 380-415D V
NUMBER OF PIECES IN THE PACKAGE	1
NUMBER OF PIECES ON THE PALLET	1

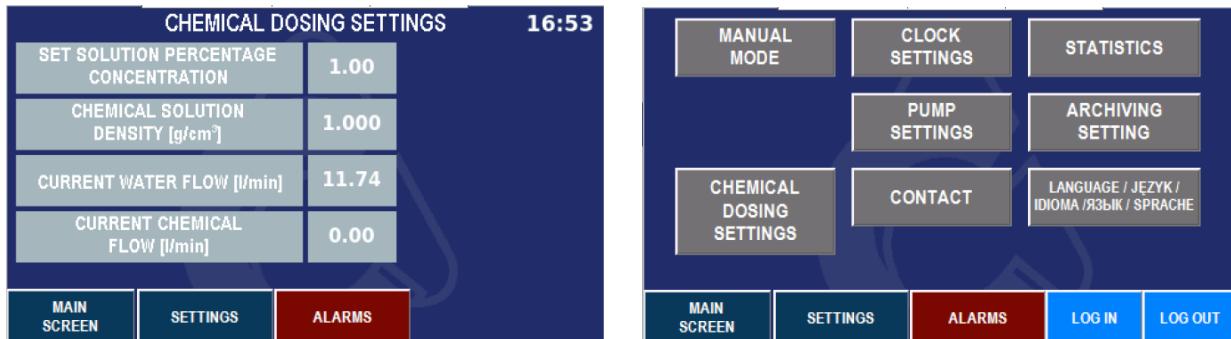

- Equipped with a Grundfos pump - one of the leading manufacturers of such solutions in the world.
- Equipped with a dosing pump concentrated preparation.
- The solution in the pipe consist of proportional dosing of a concentrated chemical preparation to the incoming water.
- Equipped with dry-running protection and overheating.
- Equipped with an inverter, which enables flexible operation of the device and reduces energy consumption.
- Central Point equipped with a PLC controller with a touch screen.
- Possibility of archiving device errors.
- Equipped with protection against workinkg on an empty tank.

Additional options:

- Possibility to install drivers other than those provided by CleanAccess according to customer requirements.
- Possibility of remote connection to a computer and data transfer.
- Equipped with a flow meter and archive water consumption readings.
- Equipped with chemical flow meter and archive chemical consumption readings.
- Equipped with energy consumption meter.
- Possibility of connecting an internet modem in order to remotely connect to the device.

MAINTENANCE

The non-return valve and filter should be checked at least once a month. Depending on the degree of wear, It is recommended to replace them at least once a year.

The Central Dosing Point should only be installed in locations where ambient temperature above 0°C is guaranteed. The equipment should be protected against temperatures below freezing, as this may cause water freezing in the system and its damage. If there is a known risk of temperature dropping below freezing, immediately remove all water from the system.