

DATA SHEET

revision date
05.07.2022

code

01.03.XX.XX.B

HYGIENIC HOSES WITH CRIMPED FITTINGS 3/4"




MATERIAL	PVC, Polyester, Stainless Steel
COLORS	Blue B
INNER DIAMETER	19+/-0,8
OUTER DIAMETER	28+/-0,8
BENDING DIAMETER	171 mm
APPROXIMATE THICKNESS	4,5 mm
MAX.WORKING PRESSURE	20 bar – only for a very short time (hose recommended for mains water systems)



SAMPLE PRODUCT CODES

TYPE	CODE	THREAD	LENGTH	NAME	WEIGHT	PACKAGE DIMENSIONS (W x H x D)	NUMBER OF PIECES ON THE PALLET
CONNECTION HOSE	01.03.025.01	2 x EXT 3/4" FLAT	2,5 m	HYGIENIC Connection hose with crimped EXT thread 3/4" - 2,5 m	1,37 kg	1 foil	-
	01.03.025.02	2 x INT 3/4" FLAT	2,5 m	HYGIENIC Connection hose with crimped INT thread 3/4" - 2,5 m	1,36 kg	1 foil	-
	01.03.025.12	INT/EXT 3/4" FLAT	2,5 m	HYGIENIC Connection hose with crimped MIX thread 3/4" - 2,5 m	1,36 kg	1 foil	-
CLEANING HOSE	01.03.15.01	2 x EXT 3/4" FLAT	15 m	Hygienic Hose with crimped EXT Thread 3/4" - 15 m	6,49 kg	41 x 41 x 25 cm	42
	01.03.15.02	2 x INT 3/4" FLAT	15 m	Hygienic Hose with crimped INT Thread 3/4" - 15 m	6,47 kg	41 x 41 x 25 cm	42
	01.03.20.01	2 x EXT 3/4" FLAT	20 m	Hygienic Hose with crimped EXT Thread 3/4" - 20 m	8,53 kg	41 x 41 x 25 cm	42
	01.03.20.02	2 x INT 3/4" FLAT	20 m	Hygienic Hose with crimped INT Thread 3/4" - 20 m	8,52 kg	41 x 41 x 25 cm	42
	01.03.25.01	2 x EXT 3/4" FLAT	25 m	Hygienic Hose with crimped EXT Thread 3/4" - 25 m	10,58 kg	41 x 41 x 25 cm	42
	01.03.25.02	2 x INT 3/4" FLAT	25 m	Hygienic Hose with crimped INT Thread 3/4" - 25 m	10,56 kg	41 x 41 x 25 cm	42
	01.03.25.12	INT/EXT 3/4" FLAT	25 m	Hygienic Hose with crimped MIX Thread 3/4" - 25 m	10,57 kg	41 x 41 x 25 cm	42
	01.03.30.01	2 x EXT 3/4" FLAT	30 m	Hygienic Hose with crimped EXT Thread 3/4" - 30 m	12,62 kg	57 x 52 x 38 cm	12
	01.03.30.02	2 x INT 3/4" FLAT	30 m	Hygienic Hose with crimped INT Thread 3/4" - 30 m	12,61 kg	57 x 52 x 38 cm	12
	01.03.30.12	INT/EXT 3/4" FLAT	30 m	Hygienic Hose with crimped MIX Thread 3/4" - 30 m	12,62 kg	57 x 52 x 38 cm	12

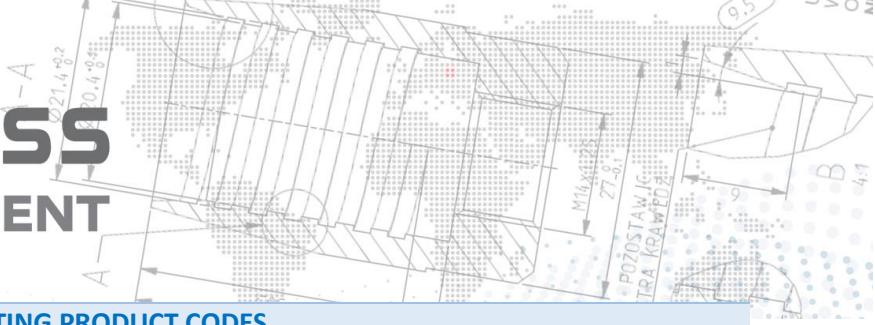

CREATING PRODUCT CODES

	LENGTH (in running meter) STANDARD LENGTHS: Connection Hoses – 1.5, 2, 2.5 i 3 m Cleaning Hoses – 15, 20, 25, 30 m	TYPES OF FITTINGS – CRIMPED 01 – 2 x EXT THREAD FLAT 02 – 2 x INT THREAD FLAT 12 – INT/EXT THREAD FLAT 05 – 2 x EXT THREAD CONE 06 – 2 x INT THREAD CONE 15 – INT CONE / EXT FLAT 25 – INT CONE / INT FLAT 16 – EXT CONE / EXT FLAT 26 – EXT CONE / INT FLAT 10 – 2 x MALE QUICK COUPLING 101 – MALE QUICK COUPLING / EXT FLAT 102 – MALE QUICK COUPLING / INT FLAT 105 – MALE QUICK COUPLING / INT CONE 106 – MALE QUICK COUPLING / EXT CONE
--	--	--

PRODUCT GROUP

01.XX.XX.XX.X


HOSE GROUP

- 01 – ULTRA HYGIENIC®
- 02 – HYGIENIC 1/2"
- 03 – HYGIENIC 3/4"


COLOUR

B – blue

Maksymalne ciśnienie robocze
 Maximum working pressure
 Максимальное рабочее давление

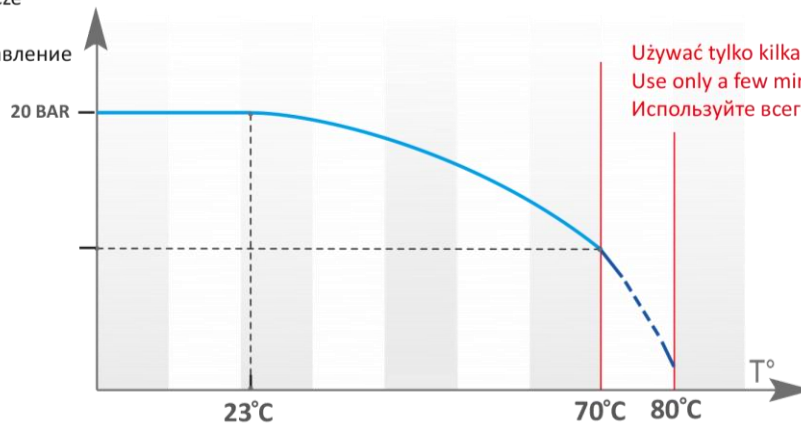

- Recommended for mains water system (6 bar). It is not designed for Central Cleaning System.
- Manufactured with 5 layers.
- Flexible and durable.
- Manufactured with textile reinforcement.
- Used for warm and cold water (max temperature – 70 degree of Celsius).
- The outer layer of this hose does not dye and is non-dusting.
- Food contact compliance declaration is available on request.
- 4 colours available soon.

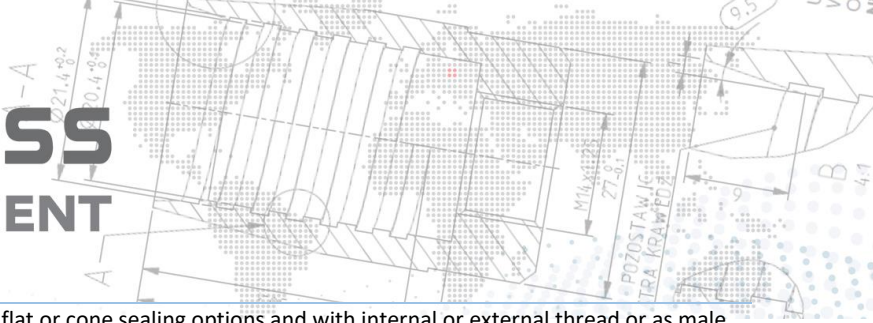

- Crimped or twisted fittings are available with flat or cone sealing options and with internal or external thread or as male quick coupling version.
- When installing the fittings on your own it is important to pay attention to the type of the fitting used (suitable for HYGIENIC hose) and the correctness of the fitting assembly. Not properly fitted or wrong fitting type will damage the hose.
- Sections of hoses with thread of flat sealing are equipped with a set of Teflon gaskets.